

WWW.METRO.COM





$\textbf{T-SERIES} \ \ \textit{with Transport Armour}^{^{m}}$

50% Less Energy than leading fiberglass

insulated cabinets!



Intelligent or Basic Controls

Digital control option with mobile power gently circulates air in cabinet and provides temperature alerts while unplugged and in transit!



Stainless steel structure with foamed-in-place polyurethane insulation provides superior heat retention & energy efficiency.







 $\mathsf{Metro}^{\, \circ}\, C5^{\, \mathsf{T}}\, {\overset{\phantom{\mathsf{T-Series}}}{\mathsf{T-series}}}\, \mathsf{Heated}\, \mathsf{Holding}\, \mathsf{Cabinets}\, \mathsf{are}\, \mathsf{specifically}$ designed for transport of hot food from a central kitchen to satellite locations. The unique features of Transport Armour™ make it the IDEAL solution for over-the-road applications.





Armour Panels

Polymer panels are optimally located to protect the cabinet from facility hazards. Molded-in hand holds create additional grab points.

Destination achieved!


Steel reinforced polymer handles that double as bumpers, protect the cabinet from impact and provide ergonomic grab points for easy handling while pushing, pulling, and crossing thresholds.



Gentle circulation of air, while unplugged and in transit, eliminates hot and cold spots that endanger food safety. Temperature stratification is 3-1/2 times better with Metro's mobile power option.

To prolong battery life, air circulation and display will shut down after 3 hours. Simply turn unit back on if additional runtime is needed.

Uses 50% Less Energy.

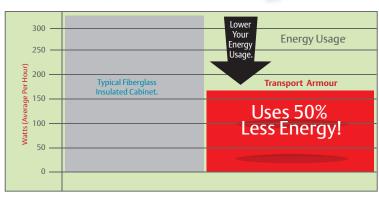

^{*} Average hourly energy consumption. Based off Energy Star Qualification, "Idle Energy, Rate-Dry" test. 150°F cabinet operating temperature. Based off full-height cabinet models.



- > Foamed-In-Place Polyurethane Insulation
- Steel Reinforced Polymer Handles Double as Bumpers
- Polymer Armour Panels With Built-In Hand Holds.
- Mobile Power for Better Temperature Stratification and Temperature Alerts
- Heavy-Duty Vaulted Door, Hinges, and Flush Paddle Latch.
- Heavy-Duty 6" Casters

Rigid Door

2" Thick Foamed-in-Place Vaulted door for maximum structural integrity. 11-Gauge Stainless Steel Hinges, Flush Paddle Latch.

Slides


3 systems to choose from to hold a variety of pan sizes. Heavy-duty extrusions designed for transport.

Smart Features Label holder and dry-erase board that doubles as a clipboard, make identifying cabinet contents and destination easy.

Configurations

The right configuration for any application. Four sizes to choose from; 1/2 Height, 5/6 Height, Full Height, and Full Height Dual Cavity with independent compartment control.

Keeps Food Hot Twice As Long.

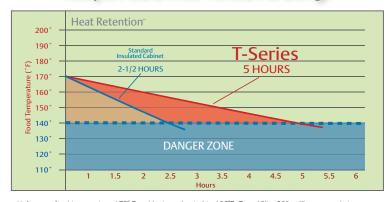

^{**} Average food temperature 170° F, cabinets preheated to 180°F. Four 12" x 20" x 4" uncovered steam pans were placed inside cabinets. Additional food mass and covered pans may result in longer heat retention.











https://www.mh-usa.com/ Sales@MaterialHandling-USA.com





WWW.METRO.COM/C5

Information and specifications are subject to change without notice. Please confirm at time of order. Standard Metro Terms & Conditions apply. See current Metro Foodservice Solutions Guide for details.



LO4-195 Rev 11/17 © 2017 InterMetro Industries Corporation, Wilkes-Barre, PA 18705

an Ali Group Company

