





Call Now for a Free Quote or Site Visit!

222 S. Main St. 5th Floor
Salt Lake City, UT 84101
800-326-4403
<https://www.mh-usa.com/>

Material Handling USA

SUPERSTORE

MH-USA

Barstock / Linear VLS

Vidir's Barstock / Linear Vertical Lift System (VLS) is an automated storage and retrieval system (AS/AR) that utilizes an elevator to climb the front of the tower to deposit and retrieve cartridges weighing up to 5,000 lb and deliver them directly to ground level for further processing, increasing material storage and flow. The result is a safe and effective storage system designed to SIL3 / CAT4 / PL e safety standards that will save valuable floorspace, eliminate redundant processes, and improve workplace safety.

- Save floor space and increase storage capacity by utilizing overhead space.
- Meets SIL3 / CAT4 / PL e safety standards.
- Contained storage environment prevents material damage.
- Automated storage eliminates forklift requirement during normal operation.
- Quick access to material
- Eliminate disruption in adjacent work cells caused by forklift operation.
- Reduce material retrieval times by up to 75%

Safe Handling • Easy Access • Maximum Storage • Fast Retrieval • Small Footprint



800-326-4403
<https://www.mh-usa.com/>
Sales@MaterialHandling-USA.com

800-326-4403 | Sales@MaterialHandling-USA.com

Bar Stock / Linear VLS




Bar Stock / Linear VLS Specifications

Technical Specifications	Imperial	Metric
Elevator Specifications		
Storage Width	120" - 294"	3,048 mm - 7,468 mm
Storage Depth	24"	610 mm
Max Height per Drawer	10" - 18"	254 mm - 457 mm
Max Load per Drawer	5,000 lbs	2,268 kg
Lifting Speed	22' ft/min	6.7 m/min
Tower Specifications		
System Height	12' - 28'	3.65 m - 8.5 m

Drawer Configuration

The Vertical Lift for bar stock and linear materials is adaptable, and can accommodate a multitude of sizes and applications. The drawers are designed to accept linear objects such as bar stock, pipes, and beams.

They can also accept custom inserts to accommodate materials of varying dimensions.




How To Load

1. Load an empty drawer on the elevator and return to home position.



2. Load the bar stock material in the drawer using a forklift or overhead crane.

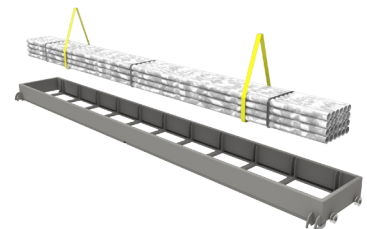

3. Remove straps or chains from the bar stock bundle via the openings in the bottom of the drawer.



4. Direct the elevator to the desired position.



Safe Handling • Easy Access • Maximum Storage • Fast Retrieval • Small Footprint